# Fisheye Network Camera Series













Application	Indoor						
Аррисации	18	30° Panoramic View	360° Panoramic View				
Model	CC8130	CC8130(HS)	FE8180	FE8174	FE8181	FE8191	
Installation	Wall Mount	Wall Mount	Ceiling/Wall Mount	Ceiling/Wall/Floor Mount	Ceiling/Wall/Floor Mount	Ceiling/Wall/Floor Mount	
Max. Sensor Resolution	1280×800 (1MP)	1280×800 (1MP)	2560x1920 (5MP)	2560×1920 (5MP)	2560×1920 (5MP)	4072×3046 (12MP)	
Max. Frame Rate	30 fps @ 1280x800	30 fps @ 1280x800	15 fps @ 1920x1920	15 fps @ 1920x1920	15 fps @ 1920x1920	12 fps @ 2944x2944	
Field of View	180° (H) 100° (V)	180° (H) 100° (V)	180° (H) 180° (V)	180° (H) 180° (V)	180° (V)	180° (H) 180° (V)	
IR Illuminators	-	-	-	-	10 m, IR LED*6	-	
Video Compression	H.264/MJPEG	H.264/MJPEG	H.264/MJPEG	H.264/MJPEG/MPEG-4	H.264/MJPEG/MPEG-4	H.264/MJPEG	
Audio Compression	G.711	-	-	AAC, G.711, G.726	AAC, G.711, G.726	AAC, G.711, G.726	
3DNR	-	-	V	-	v	V	
WDR Technology	-	-	WDR Enhanced	WDR Enhanced	WDR Enhanced	WDR Enhanced	
Smart IR	-	-	-	-	v	-	
On Board Storage	-	-	MicroSD/SDHC/SDXC card slot	MicroSD/SDHC/SDXC card slot	MicroSD/SDHC/SDXC card slot	MicroSD/SDHC/SDXC card slot	
Dimension	28 (D) x 50 (W) x 88 (H) mm	28 (D) x 50 (W) x 867 (H) mm	Ø 90 x 37 mm	Ø 139 x 34 mm	Ø 160 x 39 mm	Ø 160 x 39 mm	












	•						
Application	Outdoor						
	180° Panoramic View						
Model	CC8370-HV	FE8174V	FE8181V	FE8391-V			
Installation	Ceiling/Wall Mount	Ceiling/Wall/Floor Mount	Ceiling/Wall/Floor Mount	Ceiling/Wall/Floor Mount			
Max. Sensor Resolution	2048x1536 (3MP)	2560×1920 (5MP)	2560x1920 (5MP)	4072x3046 (12MP)			
Max. Frame Rate	30 fps @ 2048x1536	15 fps @ 1920x1920	15 fps @ 1920x1920	12 fps @ 2944x2944			
Field of View	180° (H) 130° (V)	180° (H) 180° (V)	180° (H) 180° (V)	180° (H) 180° (V)			
IR Illuminators		-	10 m, IR LED*6	10 m, IR LED*6			
Video Compression	H.264/MJPEG	H.264/MJPEG/MPEG-4	H.264/MJPEG/MPEG-4	H.264/MJPEG			
Audio Compression	G.711, G.726	AAC, G.711, G.726	AAC, G.711, G.726	AAC, G.711, G.726			
3DNR	v	-	v	V			
WDR Technology	WDR Pro (100dB)	WDR Enhanced	WDR Enhanced	WDR Enhanced			
Smart IR	-	-	v	V			
On Board Storage	MicroSD/SDHC/SDXC card slot	MicroSD/SDHC/SDXC card slot	MicroSD/SDHC/SDXC card slot	MicroSD/SDHC/SDXC card slot			
Dimension	58 (D) x 65 (W) x 115 (H) mm	Ø 145 x 47 mm	Ø 160 x 51 mm	Ø 160 x 51 mm			
Housing	IP66, IK10	IP66, IK10	IP66, IK10	IP66, IK10			
Approval	-	EN50155	EN50155	-			

#### VIVOTEK INC.

# **Cost-Effective**

Fisheye Network Camera provides 360° surround views in open areas. One single Fisheye Network Camera' s coverage area is equivalent to 3 to 4 CCTV Cameras' . Choosing Fisheye Network Camera will indeed optimize your security installation budget.

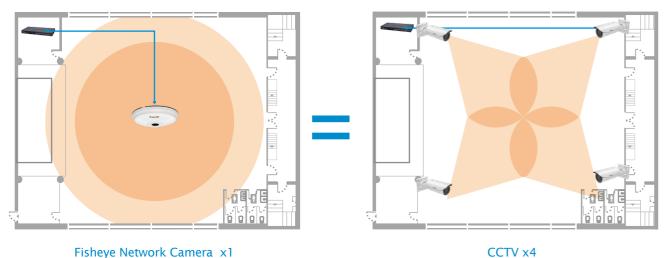

Fisheye Network Camera x1



12MP CMOS Sensor x 1






2-3MP CMOS Sensor x 4

# **Multiple Display Modes**


### • Wall Mount




Display Modes: 10 1P 1R 1P 2R (VAST) 10 3R 1P 3R (VAST)



# Ceiling/Floor Mount



Display Modes: 10 1P 1R 2P (VAST) 4R PRO (VAST) 10 3R 10 8R (VAST)




O (Original View) · P (Panoramic View) · R (Regional View)

### Built-in IR


The design of built-in IR LEDs and patent-protected light cup enables the FE8181/FE8181V/FE8391-V to provide uniformly illuminated coverage and even 360° surround illumination for clear viewing up to distances of 10 meters, even in completely dark environments.

# **Patent-Protected Light Cup**









Other brand's IR Spotlight IR with Low Uniformity

### **Various Appearances for Different Applications**

VIVOTEK provides a range of camera dimensions and value-added functions to ideally satisfy any application which calls for broad coverage but where appearance matters. VIVOTEK's Fisheye Network Camera series blend into any surroundings, packing the highest-level performance within the lowest-profile appearance.

